
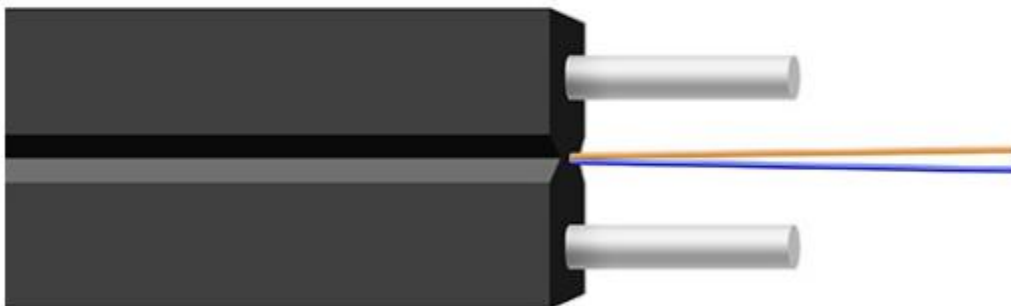


FTTH Drop Cable for Indoor (GJXFH)

Cable Design

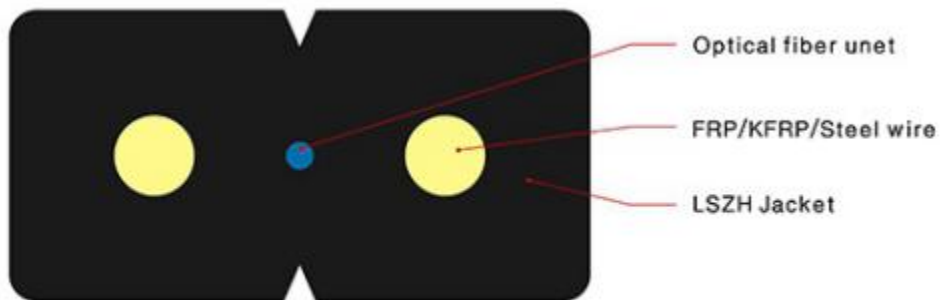

Technical data

No. of cable		2/4
Fiber Model		G.657A1
KFRP	Diameter (± 0.03) mm	0.5
	NO.	2
Outer Sheath	Material	LSZH
	Colour	white

Cable Diameter (± 0.2) mm			2.0 \times 3.0
Cable Weight (± 2) kg/km			10.0
Attenuation	1310nm	dB/km	0.50
	1550nm		0.40
Allowable Tensile Strength	Short Term	N	200
	Long Term		100
Allowable Crush Resistance	Short Term	N/100mm	2200
	Long Term		1000
Min. bending radius	Without Tension		20.0 \times Cable- ϕ
	Under Maximum Tension		40.0 \times Cable- ϕ
Temperature range (°C)	Installation		-20~+60
	Transport&Storage		-40~+70
	Operation		-40~+70

Fiber Colours

NO.	1	2	3	4
Colour	Blue	orange	green	brown
				

