


GYXTW53 Anti-rodent Fiber Optic Cable 8 Cores G652D SM

Double Armored Central Loose Tube PE

Cable Design

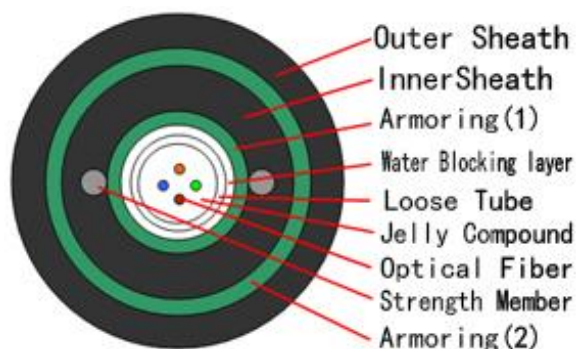

Technical data

No. of cable		2	12
Fiber Model		G.652D	
Strength Member	Material	Steel Wire	
	Diameter (± 0.05) mm	0.8	
	NO	2	
Loose Tube	Material	PBT	
	Diameter (± 0.06) mm	1.8	2.0
	Thickness (± 0.03) mm	0.28	0.3
Water Blocking layer (Material)		Water Blocking Tape	
Armoring(1)	Material	Steel Strip	
	Thickness (± 0.05) mm	0.20	
Inner Sheath Diameter (± 0.2) mm		7.7	7.9
Armoring(2)	Material	Steel Strip	
	Thickness (± 0.05) mm	0.20	
Outer Sheath (Material)		MDPE	
Cable Diameter (± 0.2) mm		11.9	12.1
Cable Weight (± 10) kg/km		127	134
Min. bending radius	Without Tension	$10.0 \times \text{Cable-}\phi$	
	Under Maximum Tension	$20.0 \times \text{Cable-}\phi$	
Temperature range ($^{\circ}\text{C}$)	Installation	$-20 \sim +60$	
	Transport&Storage	$-40 \sim +70$	
	Operation	$-40 \sim +70$	

Fibre and Loose Tube Colours

No.	1	2	3	4	5	6
Color	Blue	Orange	Green	Brown	Gray	White
No.	7	8	9	10	11	12
Color	Red	Black	Yellow	Violet	Pink	Aqua

The properties of single mode optical fiber (ITU-T Rec. G.652.D)

Item	Specification
Fiber type	Single mode
Fiber material	Doped silica
Attenuation coefficient @ 1310 nm @ 1383 nm @ 1550 nm @ 1625 nm	0.35 dB/km 0.30 dB/km 0.21 dB/km 0.24 dB/km
Point discontinuity	≤ 0.05 dB
Cable cut-off wavelength	≤ 1260 nm
Zero-dispersion wavelength	1300 ~ 1324 nm
Zero-dispersion slope	≤ 0.092 ps/(nm ² .km)
Chromatic dispersion @ 1288 ~ 1339 nm @ 1271 ~ 1360 nm @ 1550 nm @ 1625 nm	≤ 3.5 ps/(nm. km) ≤ 5.3 ps/(nm. km) ≤ 18 ps/(nm. km) ≤ 22 ps/(nm. km)
PMD _Q (Quadrature average*)	≤ 0.2 ps/km ^{1/2}
Mode field diameter @ 1310 nm	9.2±0.4 μm
Core / Clad concentricity error	≤ 0.5 μm
Cladding diameter	125.0 ± 0.7 μm
Cladding non-circularity	$\leq 1.0\%$
Primary coating diameter	245 ± 10 μm
Proof test level	100 kpsi (=0.69 Gpa), 1%
Temperature dependence 0oC~ +70oC @ 1310 & 1550nm	≤ 0.1 dB/km

Sheath marking

The optical fiber drop cable shall have sequentially numbered length marking at intervals of approximately 1 meter. The starting number of ordering length for any coil shall begin with zero meter. The accuracy of the measurement of length marking shall be held within the limits of $\pm 1\%$.

- a) Manufacturer's name
- b) Type of wire
- c) Year and month of manufacture
- d) Length marking each meter along the wire