


## LC UPC to LC UPC Uniboot Pull-Push Duplex 9/125um

### Single Mode OFNP 5M Fiber Optic Patch Cable

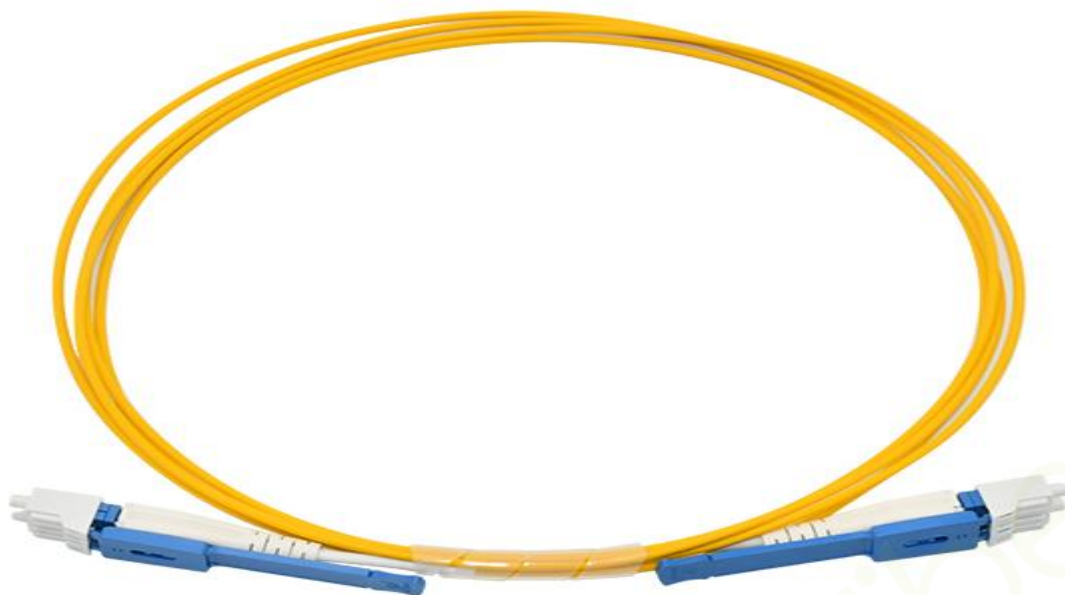

#### Description

UnitekFiber provide patchcords. Patchcord means that the terminations are connect at both ends of the optical cable to realize the optical path active connection. Optical Fiber Patchcord is similar to coaxial cable except that there is no mesh shield. The light-transmitting glass core is in the central. The fiber core has a diameter of 50/125  $\mu$  m to 65/125  $\mu$  m for multi mode fiber pathcords, which is roughly equivalent to the thickness of a human hair. The diameter for single mode fiber core is 8  $\mu$  m to 10  $\mu$  m. The fiber core is wrapped by a glass which is having a lower index of refraction than the core to maintain the fiber within the core.

#### Characteristics

- Using high precision ceramic ferrule
- Low insertion loss and high return loss
- Excellent stability and high repetition
- 100% Optic test (Insertion Loss & Return Loss)

#### Application

- Telecommunication Network
- Fiber Broad Band Network
- CATV system
- LAN and WAN system
- FOTP

#### Specification

Item	Unit	FC SC LC	ST MU	MT-RJ MPO	E2000
------	------	----------	-------	-----------	-------

		SM			MM	SM			MM	SM			MM	SM	
		PC	UPC	APC	PC	UPC	PC	PC	PC	UPC	PC	PC	UPC	PC	UPC
Insertion loss(typical)	dB	≤0.3	≤0.3	≤0.3	≤0.5	≤0.3	≤0.3	≤0.5	≤0.3	≤0.3	≤0.5	≤0.3	≤0.3		
Return loss	dB	≥45	≥50	≥60	≥30	≥45	≥50	≥30	≥45	≥50	≥35	≥55	≥75		
Operating wavelength	nm	1310 1510				1310 1510				1310 1510				1310 1510	
Exchangeability	dB	≤0.2				≤0.2				≤0.2				≤0.2	
Vibration	dB	≤0.2				≤0.2				≤0.2				≤0.2	
Operating temperature	℃	-40~75				-40~75				-40~75				-40~75	
Storage temperature	℃	-45~85				-45~85				-45~85				-45~85	
Cable Diameter	mm	φ 3.0, , φ 2.0, φ 0.9													
Repeatability	dB	Additional loss<0.1db, return loss< 5 dB													
Interchangeability	dB	Additional loss<0.1db, return loss< 5 dB													
Connection times	times	>1000													

