


Outdoor Armoured Fibre Optic Cable, 12cores G652D PE (GYXTW)

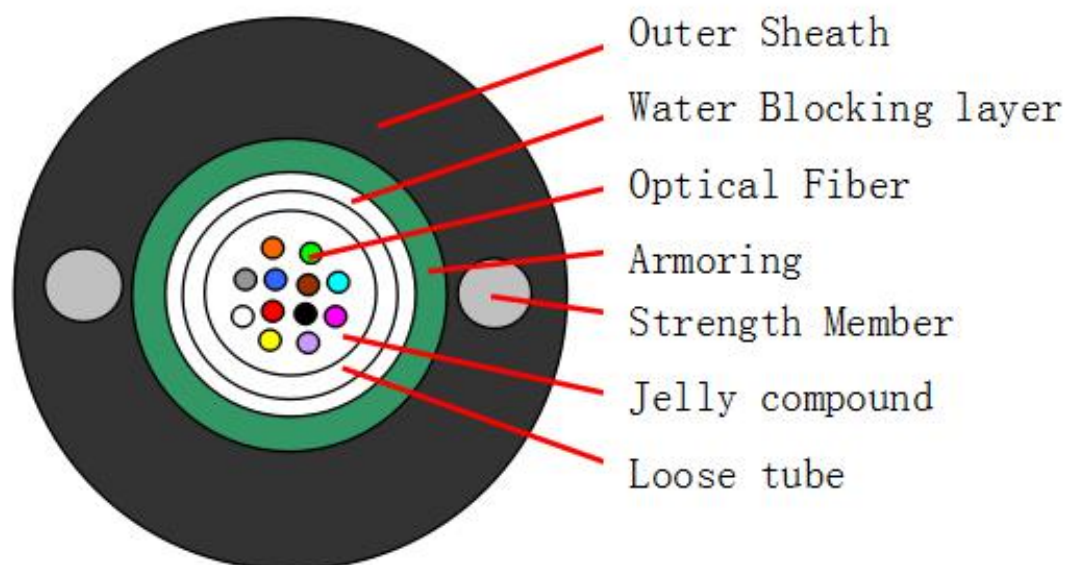

Technical data

No. of cable		10-12
Fiber Model		G.652D
Strength Member	Material	Steel Wire
	Diameter (± 0.05) mm	0.8
	NO	2
Loose Tube	Material	PBT
	Diameter (± 0.06) mm	2.0
	Thickness (± 0.03) mm	0.3
Water Blocking layer (Material)		Water Blocking Tape
Armoring	Material	Steel Strip
	Thickness (± 0.05) mm	0.20
Outer Sheath (Material)		MDPE
Cable Diameter (± 0.2) mm		7.9
Cable Weight (± 10) kg/km		51
Min. bending radius	Without Tension	$10.0 \times \text{Cable-}\phi$
	Under Maximum Tension	$20.0 \times \text{Cable-}\phi$
Temperature range ($^{\circ}\text{C}$)	Installation	-20~+60
	Transport&Storage	-40~+70
	Operation	-40~+70

Fibre Colours

No.	1	2	3	4	5	6
Color	Blue	Orange	Green	Brown	Gray	White
No.	7	8	9	10	11	12
Color	Red	Black	Yellow	Violet	Pink	Aqua

The properties of single mode optical fiber (ITU-T Rec. G.652.D)

Item	Specification
Fiber type	Single mode
Fiber material	Doped silica
Attenuation coefficient	
@ 1310 nm	0.35 dB/km
@ 1383 nm	0.30 dB/km
@ 1550 nm	0.21 dB/km
@ 1625 nm	0.24 dB/km
Point discontinuity	≤ 0.05 dB
Cable cut-off wavelength	≤ 1260 nm
Zero-dispersion wavelength	1300 ~ 1324 nm
Zero-dispersion slope	≤ 0.092 ps/(nm ² .km)
Chromatic dispersion	
@ 1288 ~ 1339 nm	≤ 3.5 ps/(nm. km)
@ 1271 ~ 1360 nm	≤ 5.3 ps/(nm. km)
@ 1550 nm	≤ 18 ps/(nm. km)
@ 1625 nm	≤ 22 ps/(nm. km)
PMD _Q (Quadrature average*)	≤ 0.2 ps/km ^{1/2}
Mode field diameter @ 1310 nm	9.2±0.4 μm
Core / Clad concentricity error	≤ 0.5 μm
Cladding diameter	125.0 ± 0.7 μm
Cladding non-circularity	≤ 1.0%
Primary coating diameter	245 ± 10 μm
Proof test level	100 kpsi (=0.69 Gpa), 1%
Temperature dependence 0oC~ +70oC @ 1310 & 1550nm	≤ 0.1 dB/km

Application:

NO.	Item	Requirement
-----	------	-------------

1	Allowable Tensile Strength	1200 N	
2	Allowable Crush Resistance	Short Term	1000 (N/100mm)
		Long Term	300 (N/100mm)

Main mechanical & environmental performance test

Item	Test Method	Acceptance Condition
Tensile Strength IEC 794-1-2-E1	- Load: Short term tension - Length of cable: about 50m	- Fiber strain $\leq 0.33\%$ - Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
Crush Test IEC 60794-1-2-E3	- Load: Short term crush - Load time: 1min	- Loss change ≤ 0.05 dB@1550nm - No fiber break and no sheath damage.
Impact Test IEC 60794-1-2-E4	- Points of impact: 3 - Times of per point: 1 - Impact energy: 5J	- Loss change ≤ 0.1 dB@1550nm - No fiber break and no sheath damage.
Temperature Cycling Test YD/T901-2001-4.4.4 .1	- Temperature step: +20°C→-40°C→+70°C →+20°C - Time per each step: 12 hrs - Number of cycle: 2	- Loss change ≤ 0.05 dB/km@1550 nm - No fiber break and no sheath damage.

Sheath marking

The optical fiber drop cable shall have sequentially numbered length marking at intervals of approximately 1 meter. The starting number of ordering length for any coil shall begin with zero meter. The accuracy of the measurement of length marking shall be held within the limits of $\pm 1\%$.

- a) Manufacturer's name
- b) Type of wire
- c) Year and month of manufacture
- d) Length marking each meter along the wire